

Wet & Damp Location Fixtures



General Description: Vapor Tight (**VT Series**) fixtures are UL listed for wet and damp location applications. UL listed strip and channel fixtures are secured inside a completely dust and moisture resistant gasketed enclosure. Gasketed enclosures feature a fiberglass upper body, high-impact acrylic\DR or polycarbonate lens, and a permanent poured in-place sealing gasket. The diffuser and upper components are secured in place by locking latches which ensure proper seal. Enclosures are water and chemical resistant. **VT Series** fixtures are available in 2', 4' and 8' models and can be configured to accept T8, T12, and T5 lamps.

Ballast Specifications: Standard fixtures utilize instant start electronic ballasts. All ballasts carry a five year warranty. Universal voltage (120v -277v) ballasts are standard on all T8 fixtures. T12 fixtures require voltage specification (120v or 277v). All T8 ballasts have a min. ballast factor >.87 as ANSI specified, and a min. power factor >98%. All ballasts have input frequency 50/60Hz, low THD: <10%, and minimum starting temperature of 0 F(-18 C). All ballasts are UL & cUL listed, and meet ANSI C82.11 specifications for electronic ballasts. High light output, low light output, rapid start and programmed rapid start ballasts available.

<u>VT</u>	<u>96T</u>	<u>432</u>	<u>EB</u>	<u>UNIV</u>	<u>PC</u>
Series VT	Length:	Lamps/Watts:	Ballast Type:	Voltage:	Lens:
	24"	1 or 2L/17w (T8)	EB: electronic	120v	Blank: standard
	48"	1 or 2L/32w (T8)		277v	DR: 100%DR(HI)
		1or 2L/48w(T12HO)		UNIV	PC: polycarbonate
		1 or 2L/54w (T5HO)		UNIV-HLO	
	96"	1 or 2L/96w (T12HO)			
	96"T	2 or 4LT/32w (T8)			
		2 or 4LT/54w (T5HO)			





Commercial Lighting Company

4930 Leary Ave NW
Seattle, Wa. 98107
Ph (206) 682-6385
Fax (206) 624-6163

www.commerciallightingcompany.com

<u>Fixture Dimensions</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>
VT24 (2' Units)	6-5/8"	5-3/16"	3-3/16"	25-7/8"	17-1/2"
VT48 (4' Units)	7-5/8"	4-3/4"	2-13/16"	49-59/64"	38-3/4"
VT48 (4' HO Unit)	7-5/8"	5-5/8"	3-5/8"	52"	38-3/4"
VT96 (8' Units)	7-5/8"	5-5/8"	2-13/16"	97-15/16"	86-3/4"

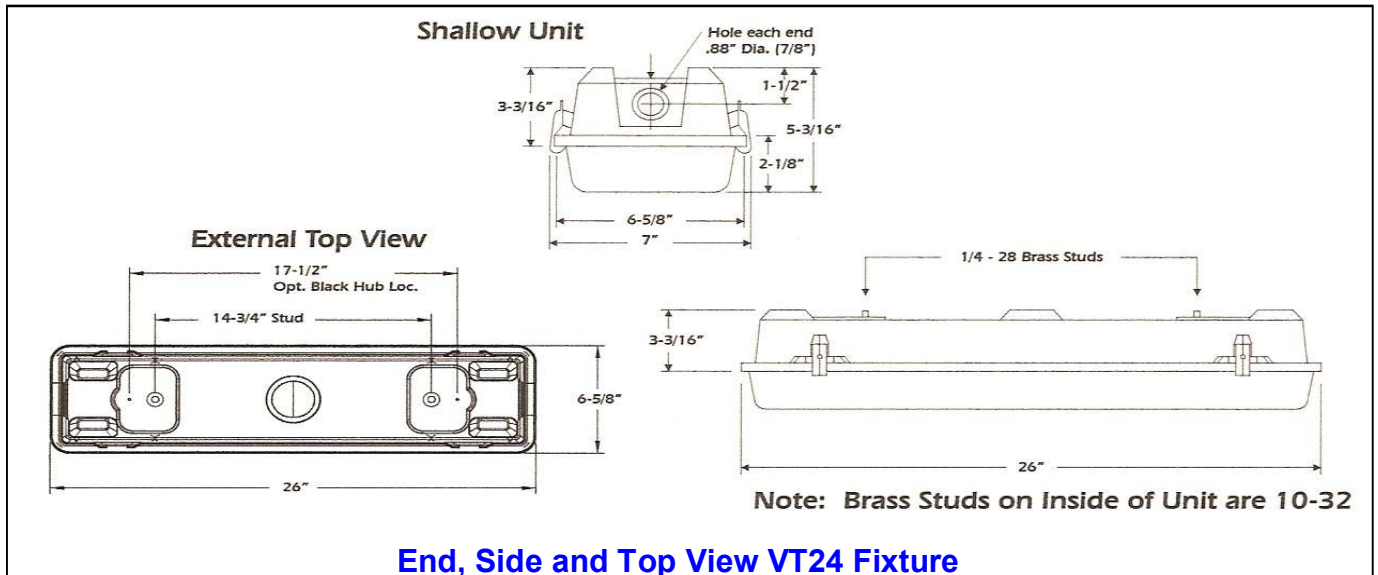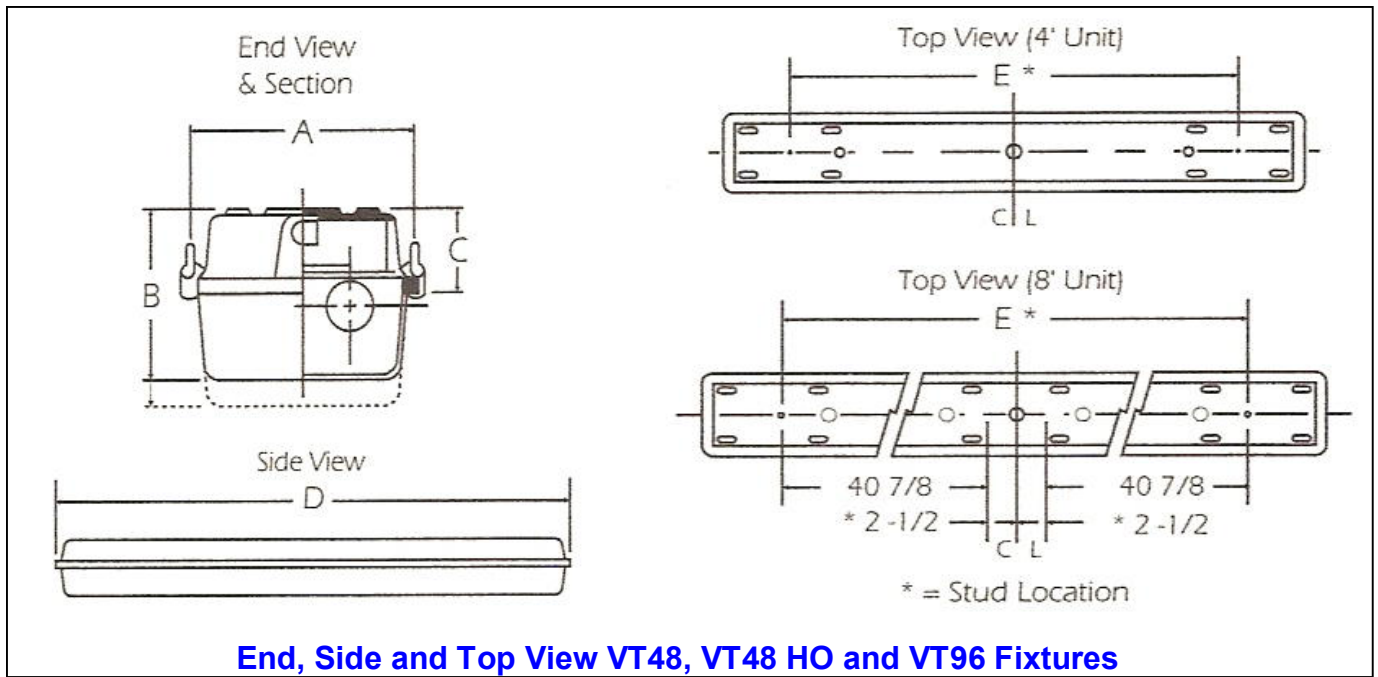

VT Series Spare Parts: LCW - White Latch (standard) BRKTT22PK - Bracket Kit
 FEPW - White End Plug Lens - Please call