


Narrow T5 and T8 Fluorescent Strip Fixtures



General Description: Narrow strip, **Series NS** single lamp fluorescent fixtures utilize T8, T5 or T5 H.O. lamps and are ideal for cove and display lighting as well as general illumination applications. NS Series fixture width is just 1-13/16”.

Ballast Specifications: Standard fixtures utilize instant start electronic ballasts. All ballasts carry a five year warranty. Universal voltage (120v -277v) ballasts are standard on all T8 fixtures. T5 and T5 H.O. fixtures are standard with universal voltage ballasts. All T8 ballasts have a min. ballast factor $>.87$ as ANSI specified, and a min. power factor $>98\%$. All ballasts have input frequency 50/60Hz, low THD: $<10\%$, and minimum starting temperature of 0 F(-18 C). All ballasts are UL listed, and meet ANSI C82.11 specifications for electronic ballasts. High light output, low light output, rapid start and programmed rapid start ballasts available.

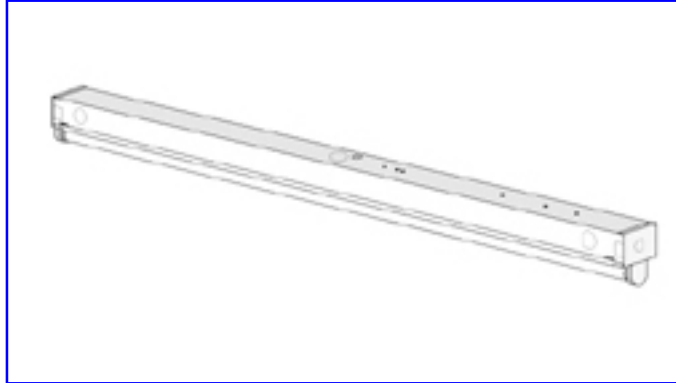

Commercial Lighting Company

4930 Leary Ave NW


Seattle, Wa. 98107

Ph (206) 682-6385 (800) 992-LITE

Fax (206) 624-6163

www.commerciallightingcompany.com

Model	Description
NS22-114EBUNIV	22" 1L 14w T5, Univ. Ballast
NS22-124HOEBUNIV	22" 1L 24w T5HO, Univ. Ballast
NS24-117EBUNIV	24" 1L 17w T8, Universal Ballast
NS34-121EBUNIV	34" 1L 21w T5 Univ. Ballast
NS34-139HOEBUNIV	34" 1L 39w T5 HO, Univ. Ballast
NS36-125EBUNIV	36" 1L 25w T8, Universal Ballast
NS46-128EBUNIV	46" 1L 28w T5, Univ. Ballast
NS46-154HOEBUNIV	46" 1L 54w T5 HO, Univ. Ballast
NS48-132EBUNIV	48" 1L 32w T8, Universal Ballast

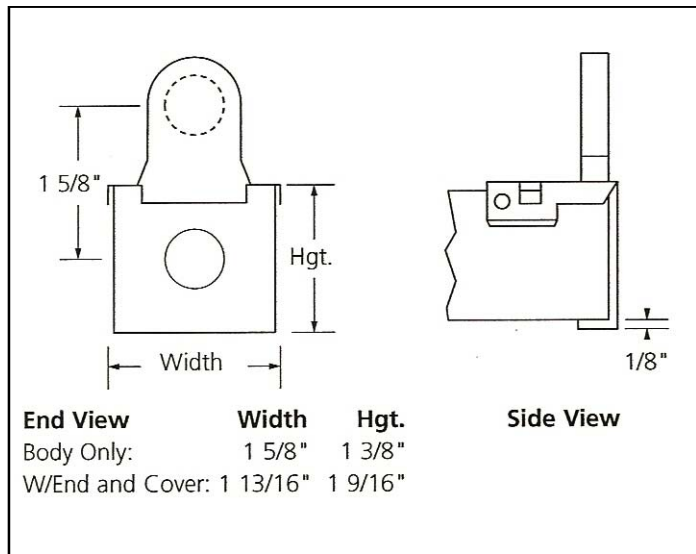

NS Series T5 and T8 Single-Lamp Narrow Strip Fixtures



Commercial Lighting Company

4930 Leary Ave NW

Seattle, Wa. 98107

Ph (206) 682-6385 (800) 992-LITE

Fax (206) 624-6163

www.commerciallightingcompany.com